


How to replace top parts on **Four®Us sofas**

- 1 Loosen the nut under the couch.
There are one on each side, underneath the seating-module.

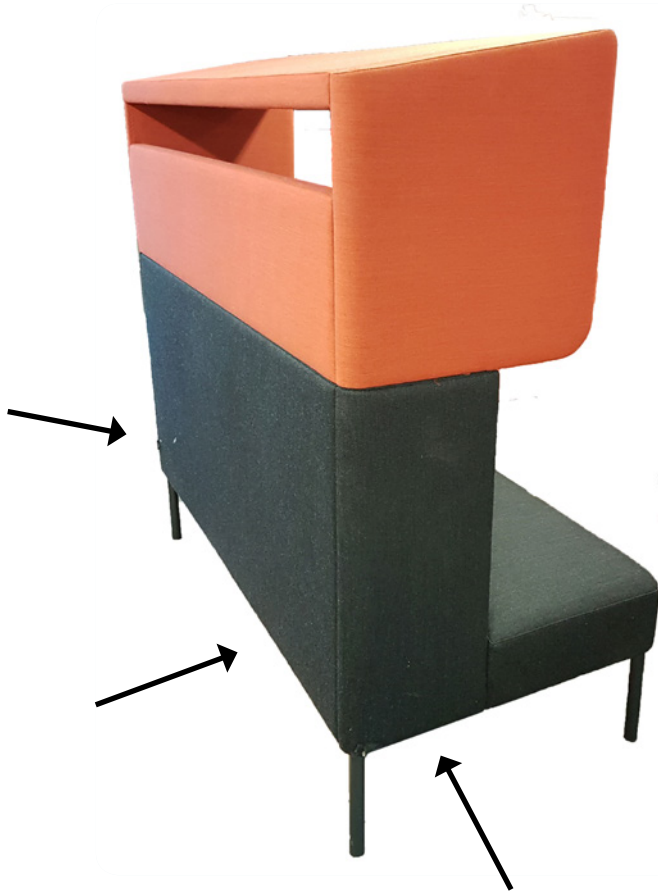

Tools used in the manual:

Umbraco key, size 5



Spanner, size 13



- 2 Loosen the nuts with aN Umbraco key size 5
and pull out the nut.



- 3 Lift the back cushion upwards until it comes to a stop.
Afterwards pull the cushion outwards to access the bolts for the top-part.

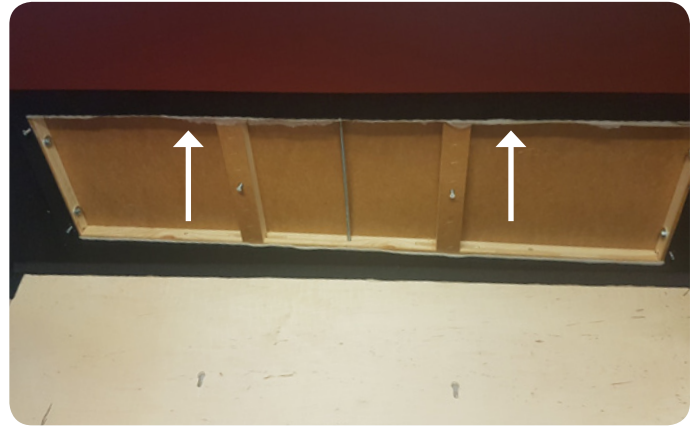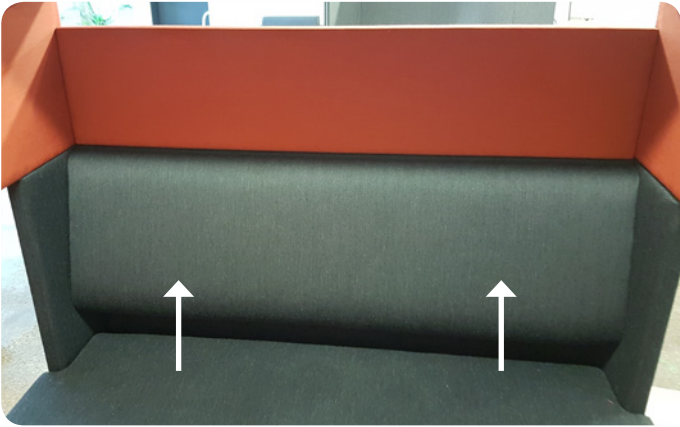

- 4 Loosen the two top bolts behind the cushion and pull them out.



- 5 Lift the top-part straight upwards, until the threaded rod is free from the bench.
Be careful with the threaded rod, when handling the top-part.



- 6 If the bench is to stand without a top-part: remove the dowels
If a new top-part is to be added: leave the dowels.

OBS! Do not screw the threaded rod out of the nut, which is in the toppart.



- 7 For adding a new toppart do this guide in reverse order.
Finish up by adding the cushion by aiming the largest holes on the cushion to the screws in the back wall. Afterwards press the cushion down while pressing the cushion inward to back wall.

